

Journal of Environmental Science, Computer Science and Engineering & Technology



An International Peer Review E-3 Journal of Sciences and Technology

Available online at www.jecet.org

Section A: Environmental Science

Research Article

The December 1984 exceptional storm: a reference event for watercourses management and flood control plans in the Saf-Saf wadi watershed, NE of Algeria

Laroussi Beloulou^{1*}, Mounia Labed², Salima Guechi¹, Saadane Djorfi¹

¹Laboratoire Ressources Naturelles et Aménagement, Université Badji Mokhtar, Annaba, Algeria

²Laboratoire Environnement Sédimentaire, Ressources Minérales et Hydriques, Université Larbi Tébessi, Tébessa, Algeria

Received: 27 August 2019; **Revised:** 10 September 2019; **Accepted:** 17 September 2019

Abstract: Flood hazard prevention plans and watercourse management require a lot of data; the most important is the flood event that will serve as a reference. In practice, this reference flood is often assumed to be the greatest ever known historical flood or the 100-year flood if the latter would be greater than the recorded historical one. The purpose of this paper is to provide some data that help in the elaboration of such plans. Indeed, analysis of severe storms and extreme discharge records in the Saf Saf wadi watershed and statistical data processing (frequency analysis) revealed that the December 28th, 1984 to January 1st, 1985 heavy storm is an exceptional event with respect to the intensity (324 mm in 5 days), the magnitude of the generated flood (peak discharge: 754 m³/s, flood volume: 75 hm³ at the Zardézas dam) and the extent of property damages and human losses (11 dead). Historical data and frequency analysis results show that this deadly well documented event could be a good reference to elaborate flood control and watercourse management plans to reduce vulnerability to flooding in the Saf-Saf wadi basin.

Key words: Saf-Saf wadi, Algeria, heavy rains, watercourses, flood control plans

INTRODUCTION

Sustainable flood risk management is a matter of reducing the vulnerability of people and property to floods by adopting rational policy measures. It is a much more efficient and a preventive way than controlling water flow by hydraulic structures that rapidly lose their performance during high floods. Reducing vulnerability is not to increase the number of people and activities subjected to flood hazard and to take actions to limit damages for those already located in flooding areas.

In Algeria, this new flood prevention strategy has been introduced by the 24 and 25 clauses of Law No 04-20 of December 25, 2004 on major hazards and disasters management prevention within the context of sustainable development¹. This law is issued following several deadly floods; the most important is the 2001 Algiers Bab el Oued flood (more than 700 deaths). To elaborate flood hazard prevention and watercourse management plans requires efficient data on historical river discharges and heavy rain events in order to define the reference flood. Some foreword steps should therefore be followed: maximum discharge and severe storms frequency analysis, rainfall-runoff modeling and flood hazard mapping.

At the outlet, to the East of Skikda City, this 55 km long river and its tributaries drain an 1158 km² area (**Fig. 1**).

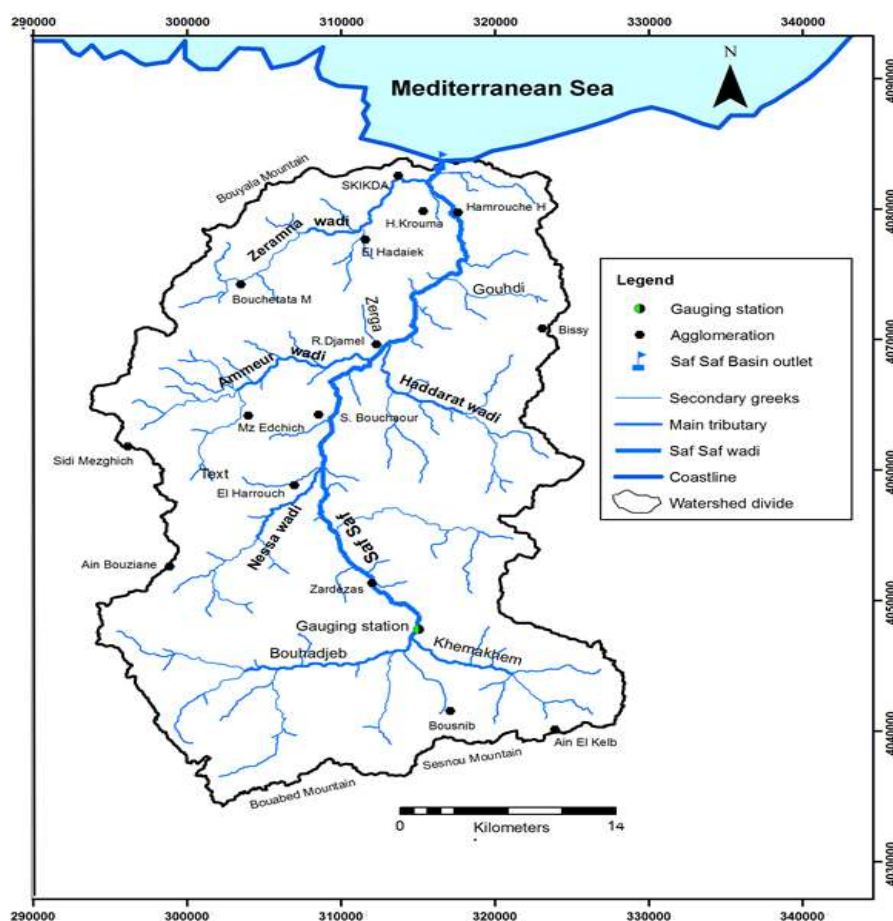


Fig.1: Saf Saf wadi basin-Situation and hydrographic network map.

The Saf-Saf hydrographic system originates at the confluence of the Bouhadjeb and the Khemakhem wadis in the Constantine Mountains and flows north to the Mediterranean Sea. Along its course, the river traverses the upstream Zardezas rolling hills and the Salah Bouchaour-Ramdane Djamel-Hamrouche Hamoudi flood plains. Its tributary, the Zeramna wadi drains the southwestern part of the basin and flows into the large plain of El Hadaiek-Merdj Eddib to join the Saf-Saf in the vicinity of the petrochemical industrial zone. These flatlands are urbanized and, therefore, highly vulnerable to flooding.

In this study, we attempt to extract some useful information from the December 1984 extreme rainfall event and the generated deadly flood in order to present some guide values that help in elaborating such a plan in the Saf-Saf wadi basin.

MATERIAL AND METHODS

2. 1. The December 1984 exceptional rainfall event characteristics

The December 1984 flood is the result of a series of severe and exceptionally intense storms that struck the entire Saf-Saf wadi basin (452.5 mm in 16 rainy days, 137 mm recorded rain on December 29th, 1984 at the Zardezas Dam rain gauge). Similar daily intense rainfall events were also observed on the same day at other stations in the watershed (75.6 mm in Bousnib, 111.2 mm in Ramdane Djamel and 73.5 mm in Skikda). **Table 1** gives some rainfall indices recorded in the watershed between the 28 and 30th of December, 1984.

Table 1: Rainfall indices related to the December 1984 flood (mm)

Rain gauge name	Code	12/28	12/29	30/12	Cumulative : December, 1984	Year : 1984/85
Upstream part of the watershed						
Bousnib	030905	-	75.6	-	269.8	783.6
Ain El Kelb	030904	-	103,2	-	212,0	650,3
Zardezas	030903	-	137	-	452.5	1039.4
Middle stream part of the watershed						
El Harrouch	030906	41.8	93.8	97.6	379.6	932.2
Ramdane Djamel	030909	73.6	111.2	84.3	427.8	1028
Downstream part of the watershed						
Skikda	030801	50.9	73.5	72.3	347.5	1148.9

For more details on this exceptional event, rainfall recording charts at the Zardezas Dam are analyzed. The rain started falling on the December 28th, 1984 at 2:45 and ended on the January 1st, 1985 at 12:11. Automatic data processing allowed obtaining hyetographs and maximum intensities observed for different reference durations. In **Table 2** rainfall depths recorded during a 6 hour duration interval are presented in the following diagram (**Fig. 2**).

Table 2: Hyetograph outputs for a 6-hour duration at the Zardezas Dam (Rainy periods:
12/28/1984 - 01/01/1985)

Reference duration (h)	Rainfall depth (mm)			Composite hyetograph (Dec 28 th , 1984-Jan 1 st , 1985)
	Dec 28 th 1984	Dec 29 th -30 th 1984	Dec 31 th ,1984-Jan 1 st , 1985	
0-6	11,5	27,2	37,4	11,5
6-12	19,5	49,7	9,5	20,0
12-18	8,9	33,5	3,7	8,5
18-24	19,0	35,1	11,6	19,0
24-30	4,0	11,6	3,9	4,0
30-36		17,7	18,9	9,1
36-42		1,3	0,1	41,9
42-48				39,5
48-54				50,0
54-60				8,8
60-66				20,9
66-72				21,6
72-78				30,2
78-84				3,7
84-90				4,8
90-96				9,6
96-102				12,6
102-108				8,4
Total (mm)	63,0	176,0	85,0	324,0

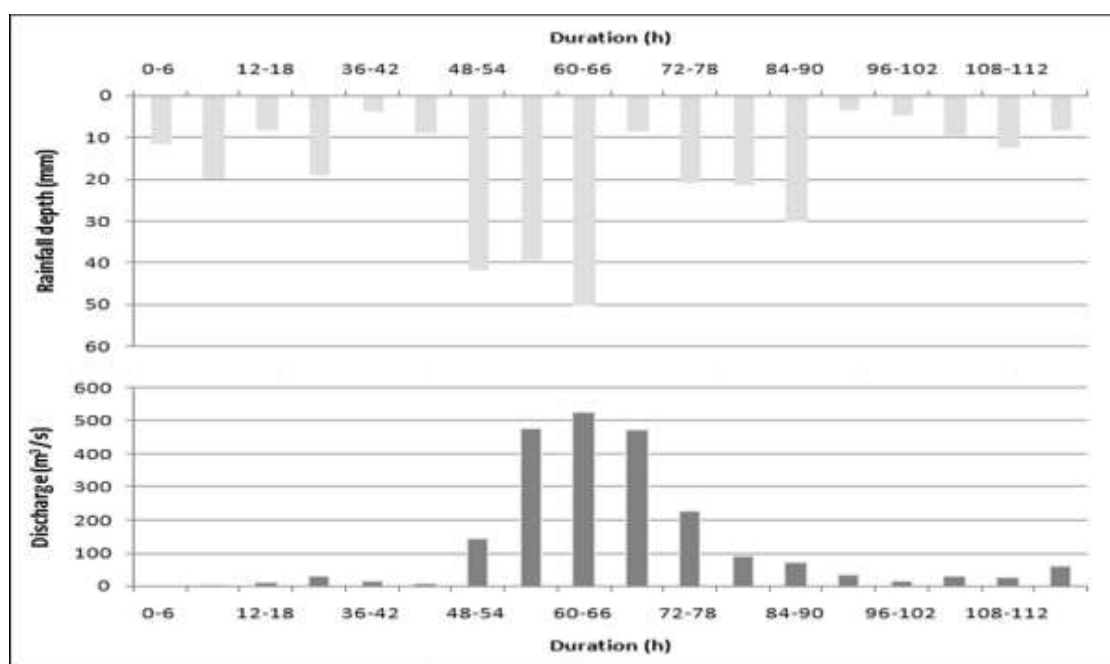


Fig. 2: Hyetograph and hydrograph of the 28/12/1984 to 01/01/1985 flood.

A close look at the analysis results of this extremely severe storm event shows that the rainfall recorded on 29 and 30 December at the Zardezas Dam is marked by very high intensities (50.0, 89.5 and 131 mm in 6, 12 and 18 hours, respectively, and 324 mm in 4 days). These nonstop torrential rainfall events and saturated soil by antecedent rainfall conditions (63 mm recorded on December 28) are the main factors that affected the rapid rise of water levels in the stream. Maximum peak discharges and volumes are 559 and 754 m³/s at the Khemakhem discharge gauging station and the Zardezas Dam spillway, respectively, on December 30 at 4:00 am. Respective flood volumes are estimated to be 50 and 75 Hm³ corresponding to 157.0 and 218.0 mm of runoff in 4 days. The volume that entered the dam is equivalent to 2.4 times the initial dam capacity of 31 Hm³. The December 1984 Rainfall-Runoff event main characteristics are summarized in **Table 3**.

Table 3: Characteristics of the 28/12/1984 to 01/01/1985 *Rainfall-Runoff* event

Characteristics	Khemakhem gauging station	Zardezas Dam gauging station
Rainfall depth (mm)	324.0	345.0
Runoff (mm)	157.0	218.0
Runoff coefficient (%)	48.5	67.3
Begining of flood	12/28 at 00:00	12/28 at 00 :00
End of flood	01/01 at 13:00	01/01 at 13 :00
Peak discharge	559	754
Peak discharge date and hour	30/12 at 04:00	30/12 at 04 :00
Flood volume (Hm ³)	50.5	75.2

2.2. Flood frequency analysis:

Relevant estimate of extreme hydrological events is critical because of the significant risks associated with poor knowledge of these variables. Frequency analysis of hydrological data is a preferred approach to obtaining good estimates of extreme events if sufficient information is available at the site of interest. However, due to the large extent of the watershed and the hydrographic network, the question of estimating extreme events in sites where little or no information is available often arises.

The objective of this section is to predict the absolute maximum flows (Q_p or peak flows) for given return periods (T) or probabilities of occurrence (P) of the Saf-Saf wadi at the Khemakhem gauging station. The outcomes are then transposed to different temporal and spatial scales defined by the main sub-basins, assuming that the latter belong to the same hydrological unit. Furthermore, the validity of the results of the frequency analysis is strongly dependant of the length of the time series and the method used to evaluate the intensities of rare events². In this purely probabilistic approach, the evaluation of rare events is usually summarized by the fitting of a probability distribution model to the empirical frequency distribution of maximum observed flows.

Low frequency flow rates are deduced from the extrapolation of the adjusted statistical law and the T -year flows are used to define reference floods to develop flood hazard prevention and watercourse management plans in the Saf-Saf basin. In hydrology, several frequency models are often used to describe the statistical behavior of extreme values. The validity of the results of the frequency analysis

depends on the choice of the frequency model (and more particularly on its type). Indeed, this analysis, which makes use of various statistical techniques and powerful automatic calculation programs, constitutes a complex process which must be dealt very rigorously.

2.2.1. Data processing and reliability analysis of peak flow time series: In frequency analysis, where the observed information over a relatively short series is to be transferred to longer series, the question of the quality and reliability of the data often arises. Should all available data be used? Or, on the contrary, should some values be considered as outliers for one reason? In this work, this question is approached using various techniques to detect potentially undesirable values because the presence of exceptionally low or high values in a data sample may lead to an overestimation of the standard deviation, an important parameter that describes the adjusted probability law.

From a mathematical point of view, the frequency distribution study of a random variable requires, in addition to the relevance of data, the verification of some basic hypotheses, in particular the random and homogeneous nature of the values taken by the variable in question. Peak discharge records (absolute maximum flow or peak flow: Q_p) were subjected to an exploratory data analysis³ and to a series of hypothesis tests in order to check the suitability of the peak discharge time series to frequency analysis. In addition to graphical tests (histogram, box plot, stem and leaf diagrams), the non-parametric tests of Wald-Wolfowitz for randomness⁴ and Mann-Whitney for homogeneity⁵ as well as the Grubbs and Beck test for outliers⁶⁻¹⁰ integrated into the Hydrological Frequency Analysis and Statgraphics Centurion XV softwares have been applied.

Exploratory analysis of a 34 year observation period (1968/69-2000/01) and statistical tests results show that the peak flow time series is suitable for frequency analysis. They also point out the presence of three extremely large events in the series (**Fig. 3**). These events are retained because they are not considered as outliers; they correspond to the highest floods generated by the heavy rains during the observation period.

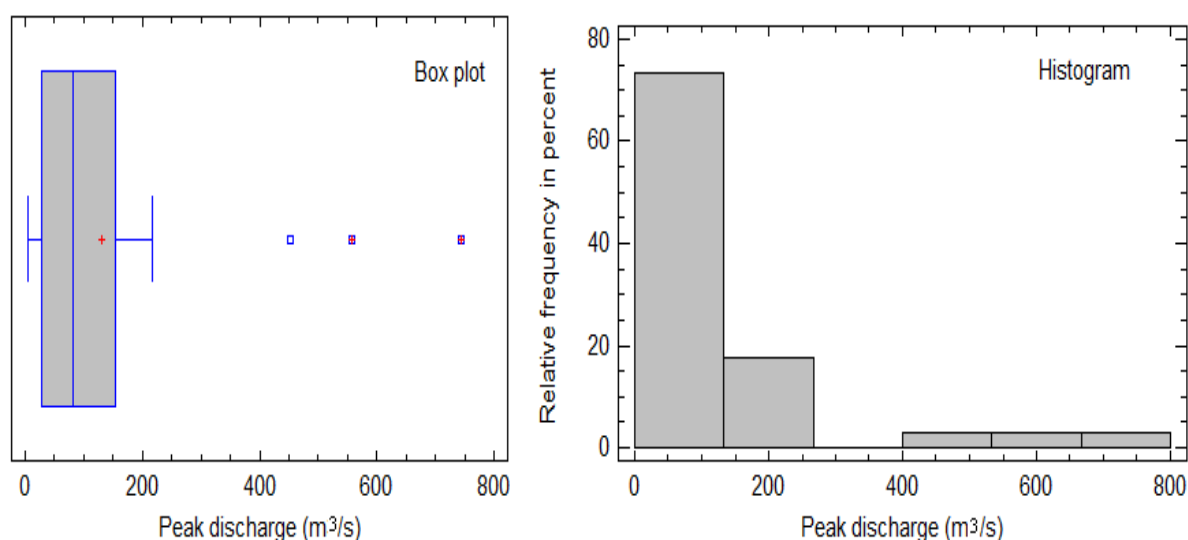


Fig. 3: Distribution of empirical peak discharge of the Saf-Saf wadi

2.2.2. Frequency Analysis: From a descriptive statistics point of view, the histogram shape and the positive value of the asymmetry coefficient (**Table 4**), show that the empirical distribution of the maximum annual flows is skewed to the right.

Table 4: Saf-Saf wadi peak discharge at the Khemakhem gauging station

Parameter	Mean	Median	Std. Deviation	Minimum	Maximum	Skewness	Kurtosis
Q _p (m ³ /s)	139.69	80,535	160,93	5.48	745.1	2.53	6,92

Therefore, probable flow rates might be estimated by theoretical probability distribution laws which have the same characteristics namely, the Gamma, Gumbel (EVI), Generalized Extreme Values (GEV), Log Pearson III, Fréchet and Log-normal distributions. Parameters that fully describe each probability law are estimated from observed data using the method of moments integrated in the Mathwave Technologies Company *EasyFit* software and are reported in **Table 5**.

Table 5: Adjusted probabilistic model parameters

Distribution	Domain	Position	Scale	Shape
Fréchet	$0 < x < +\infty$	0	37,775	0,95963
Gamma	- $0 < x < +\infty$	0	198,17	0,6595
GEV	$1 + k \frac{(x-\mu)}{\sigma} > 0 ; k \neq 0$	55,341	60,187	0,41061
Gumbel (EVI)	$-\infty < x < +\infty$	58,264	125,48	0
Log-Pearson III	$0 < x \leq e^{\gamma} ; \beta < 0$ $e^{\gamma} \leq x < +\infty ; \beta > 0$	14,579	-0,13646	75,593
Log-normal	$0 < x < +\infty$	4,2643	1,1688	0

The goodness of fit (GOF) is appreciated by graphical techniques including the quantile-quantile (Q-Q) and probability-probability (P-P) plots and statistical tests such as the Kolmogorov-Smirnov (D), the Anderson-Darling, (W^2) and the Pearson (χ^2) tests integrated in the Easyfit software. Since graphical techniques provide a visual comparison of simulated and measured data and a first overview of model performance, the assessment of the probability distribution models is basically appreciated by the total GOF test score obtained from all the statistical tests. Test scores ranging from one to six (1-6) are attributed to each distribution model based on the criteria that the distribution with the lowest total score is chosen as the best distribution model for the data. That is, the distribution best supported by a test is attributed a score of one (1), the next best is awarded two (2), and so on in ascending order. The overall ranks of each distribution are obtained by summing up the individual test ranks (**Table 6**). Finally, a distribution is not taken into account if the test indicates that there is a significant difference between the predicted and observed discharge values at the 5% significant level.

Since the peak flow time series is relatively short ¹¹ and the overall rank sum is minimum, the General Extreme Value distribution is preferred, over the log-Pearson III and log-normal models, to estimate the T-year peak discharge in the Saf-Saf wadi at the Khemakhem control station for 10 specified recurrence intervals (T) between 2 and 1000 years (**Table 7**).

Table 6: Goodness of fit test results

Distribution	D		W ²		χ^2		Total score
	Statistics	Score	Statistics	Score	Statistics	Score	
<u>Fréchet</u>	0,18835	5	1,1947	5	5,0093	6	16
<u>Gamma</u>	0,1195	4	0,824	4	2,8842	4	12
<u>Gen. Extreme Value</u>	0,07652	1	0,29874	2	0,58453	1	4
<u>Gumbel (EVI)</u>	0,21806	6	2,0432	6	4,9866	5	17
<u>Log-Pearson 3</u>	0,09575	2	0,27815	1	2,7278	3	6
<u>Lognormal</u>	0,11134	3	0,34964	3	2,0237	2	8

Table 7: Probable maximum flood of the Saf-Saf wadi at Khemakhem (m³/s)(GEV model : $k = 0,41061$ $\sigma = 60,187$ $\mu = 55,341$)

Probability	0,999	0,998	0,995	0,99	0,98	0,96	0,95	0,90	0,80	0,50
T (years)	1000	500	200	100	50	25	20	10	5	2
Q _{max} (m ³ /s)	2410	1790	1200	880	636	454	405	278	180	79

RESULTS AND DISCUSSION

Reference discharges for watercourses management and flood control plans in the Saf-Saf watershed: In the Saf-Saf watershed, historical data recorded during the 1968/69-2000/01 period at Khemakhem station, the only hydrometric gauging site that controls the upper 322 km² Saf-Saf sub-basin, are compared to the probable discharges presented above. It appears that the highest observed floods in the last four decades are:

- the 1969/70 flood: Q_{max}: 453 m³/s , 25- year flood,
- the February 2nd to 5th, 1985 flood: Q_{max}: 745 m³/s, volume: 29 Hm³, duration: 4 days, 70-year flood,
- the December 28th, 1984 to January 1st, 1985 flood: Q_{max}: 559 m³/s, volume: 50.5 Hm³, duration: 5 days, 38-year flood.

At the Zardezas dam site, the December 28th, 1984 to January 1st, 1985 flood peak discharge, volume and return period are 754 m³/s, 75.2 Hm³ and 72 years, respectively. Qualified to be exceptionally high floods, the magnitude of these extreme events is less than the predicted 100-year flow (880 m³/s).

Being the most devastating flood in the Saf-Saf basin with respect to duration, volume and human and property damages (11 deaths, severe damage to basic infrastructures, buildings collapses due to landslides, 400 hectares agriculture losses, etc.), the December 1984 flood may be considered as reference flood to formulate flood risk and watercourse management plans in the Saf-Saf wadi and its main tributaries. Such a reference random event is transposed to ungauged sub-basins in the Saf-Saf wadi watershed using the Francou-Rodier Regional Model¹² which takes the form:

$$Q(T) = 10^6 \times \left(\frac{A}{10^8} \right)^{1 - \frac{k(T)}{10}} \quad (1)$$

where $Q(T)$ is maximum discharge of T -year return period (m^3/s); A is catchment area (km^2); K is the Francou-Rodier flood index coefficient to be estimated from observed data. Solving the above equation for $K(T)$ yields:

$$k(T) = 10 \times \left[1 - \frac{\log Q(T) - 6}{\log A - 8} \right] \quad (2)$$

Introducing the values of the 72-year flood at the dam spillway ($Q_{72\text{yr}} = 754 \text{ m}^3/\text{s}$; $A = 345 \text{ km}^2$) and the 100-year flood at the Khemakhem station ($Q_{100\text{yr}} = 880 \text{ m}^3/\text{s}$; $A = 322 \text{ km}^2$) into equation 2, the estimated $K_{72\text{yr}}$ and $K_{100\text{yr}}$ values are 4,435 and 4,436, respectively. If the Francou-Rodier flood index coefficient is set to 4.44 and if the channel flood routing effects are taken into account, the reference design flood in the Saf-Saf watershed, rounded to nearest 10, are reported in **Table 8** and **figure 4**.

Field topographic surveys on historical flood that are memorized by riparian residents and high water marks will make it possible to make cross section and longitudinal profiles of the Saf-Saf wadi and its main tributaries in the areas affected by flooding. These post-flood surveys data (geometry of specific cross-section, river slope) and the predicted reference design floods (100-year flood) for each ungauged river are used as inputs to validate a Manning-Strickler or any stage-discharge type hydraulic model to provide, for each profile, the submerged zone width, the submergence stages (depth of water) and the distribution of flow rates and velocities. These data are required for watercourses management and flood risk mapping as defined in major flood prevention strategies worldwide. The will to collaborate and the ability to reach consensus among all concerned actors are essential conditions for the success of such a regulatory and technical project.

Table 8: Adopted 100-year design flood in the Saf-Saf wadi basin,
(Francou-Rodier flood index coefficient $k = 4.44$)

N°	Wadi and basin outlet names	Basin area (km^2)	$Q_{100\text{yr}}$ (m^3/s)
1	Saf-Saf at Khemakhem	322	880
2	Nessa at the confluence with Saf –Saf	106 *	475
3	Saf-Saf at Salah Bouchaour Bridge	543	1180
4	Ammeur at the confluence with Saf-Saf	144	565
5	Hadarat at Ramdane Djamel	143	560
6	Zerga at Ramdane Djamel	17	170
7	Saf-Saf at Ramdane Djamel (Gare SNTF)	858	1525
8	Gouhdi at Bountous	31	240
9	Zeramna at the Skikda bypass	128	530
10	Saf-Saf at the outlet (Mediterranean sea)	1158	1800

* Values of basin area in italic bold are taken from Abdelli *et al.*¹³

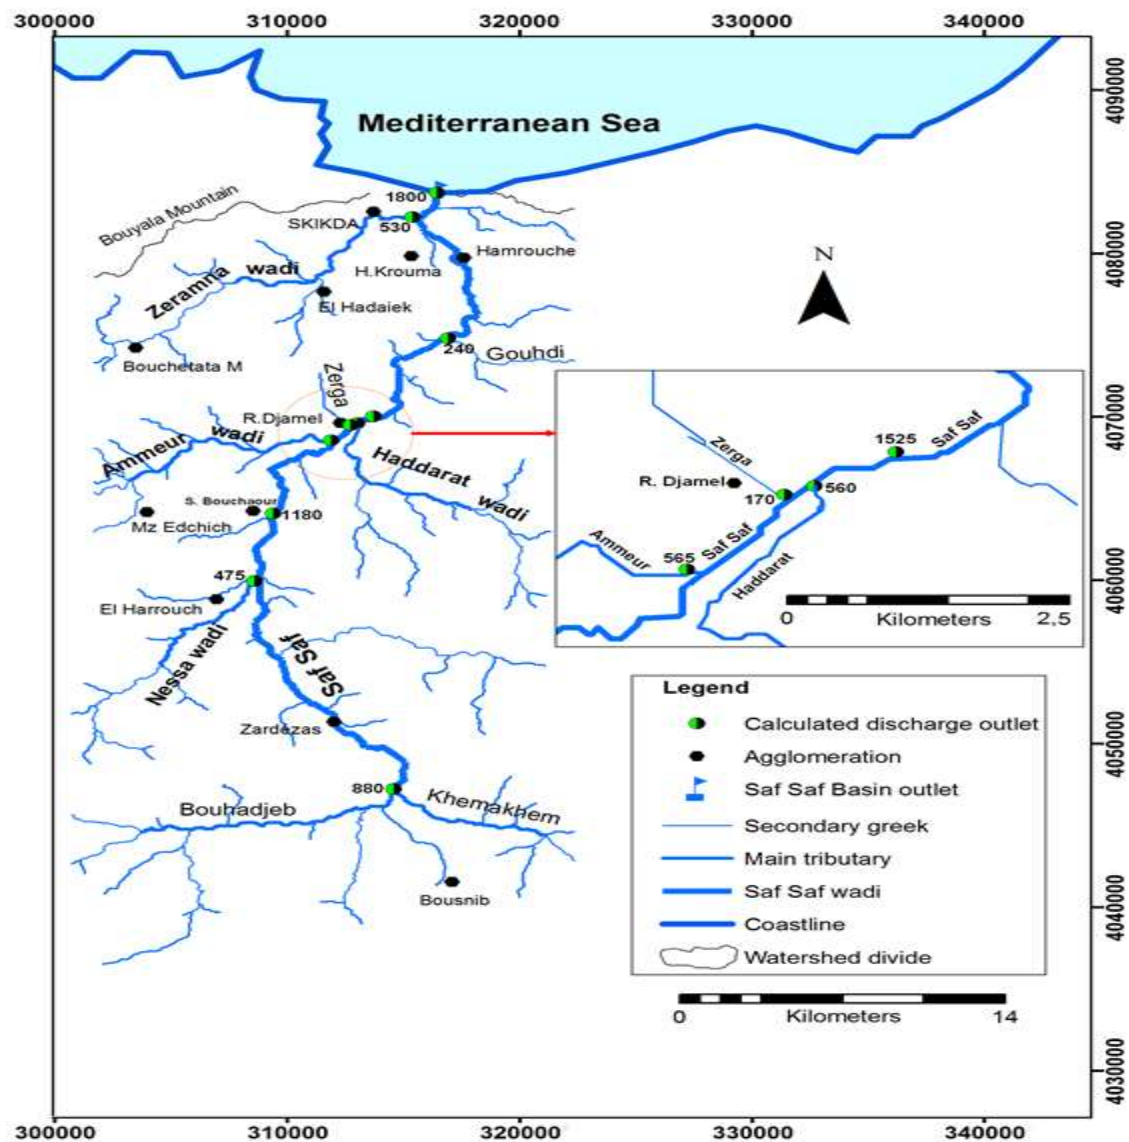


Fig. 4: 100-year design flood distribution in the Saf-Saf wadi basin.

CONCLUSION

At the end of this work, it should be noted that flood phenomena are a part of nature. They always exist and will continue to exist. Based on past years observed evolution and trends, the approach to deal with natural hazards requires a change of conception. We have to move from a purely defensive action against random events to effective hazard management in order to reduce potential losses. Professionals involved in the implementation of prevention and protection policies, whether they are political or technical, must ensure that all efforts are made to fulfill these objectives. Whatever the measures taken to limit hazard magnitude and to regulate land use, the effectiveness of the long-term flood prevention policies depends on the development of information that encompasses the risk notification and facilitates public participation in the decision-making process. To this end, the identification of floodplain areas must be systematically and widely publicized through flood hazard maps. In the Saf-Saf wadi watershed, these maps are established by combining the predicted 100-year design flood, field surveys and hydraulic modeling

REFERENCES

1. RADP, Loi n° 04-20 du 25 Décembre 2004 relative à la prévention des risques majeurs et à la gestion des catastrophes dans le cadre du développement durable. *Journal Officiel N° 84*, 2004.
2. J. Comby, Les problèmes d'échelles dans l'évaluation spatiale et temporelle des précipitations de fortes intensités. *Actes du Colloque International « Risques et territoires »*, Lyon, 16-18 mai 2001, 213-226.
3. J. W. Tukey, *Exploratory data analysis*, Reading, MA: Addison-Wesley, 1977.
4. G. K. Kanji, *100 statistical tests*, 3rd Edition, 2006, SAGE Publications Ltd, London, p. 118-129.
5. Y. Dodge, *Premiers Pas En Statistique*, 2006, Springer, Paris, 427 p.
6. F.E. Grubb, G. Beck, Extension of sample sizes and percentage points for significance tests of outlying observations. *Technometrics*, 1972, 14, 847-854.
7. G. Carletti, Détection automatique des valeurs anormales, *Revue de statistique appliquée*, 1976; 24(3), 61-70.
8. V. Planchon, Traitement des valeurs aberrantes: concepts actuels et tendances générales. *Biotechnologie, Agronomie, Société et Environnement*, 2005, 9 (1), 19-34.
9. S.P. Verma, A. Quiroz-Ruiz, Critical values for 22 discordancy test variants for outliers in normal samples up to sizes 100 and applications in science and engineering, *Revista Mexicana de Ciencias Geológicas*, 2006, 23(2), 302-319
10. A. Kaya, Statistical modeling for outlier factors, *Ozean Journal of Applied Sciences* 2010, 3(1), 185-194.
11. C. Svensson, D.A. Jones, Review of rainfall frequency estimation methods. *Journal of Flood Risk Management*, 2010, 3(4), 296–313.
12. J. Francou, J. Rodier, Essai de classification des crues maximales observées dans le monde, *Cahiers. ORSTOM, série Hydrologie*, 1967, 4(3), 19-46.
13. H. Abdelli, S. Azzoun, M. Boulahia, S. Selougha, M. Mehalli, S. Kechroud, Contribution à l'évaluation des ressources en eau dans le bassin versant de l'oued Saf-Saf. *Mémoire d'Ingénieur* (2 tomes), 1991, Université d'Annaba.

Corresponding author: Laroussi Beloulou,

Laboratoire Ressources Naturelles et Aménagement, Université Badji Mokhtar, Annaba, Algeria

laroussi.beloulou@univ-annaba.dz